



INTRODUCING THE LATEST WESSEX FLAIL MOWER RANGE

ENGINEERED FOR UNPARALLELED STRENGTH AND DURABILITY, MAKING THE MANAGEMENT OF DENSE VEGETATION EFFORTLESSLY EFFICIENT.

OFFERED IN 2.5M AND 2.8M WIDTHS, THESE MOWERS FEATURE HYDRAULIC SIDE SHIFT FOR ENHANCED MANOEUVRABILITY.

4 POSITION SETTINGS FOR THE REAR DOOR.


The **WFX** and **WFR** flail mowers boast a versatile rear door with four adjustable positions, catering to various applications. The fully closed position will enhance mulching, while the open positions mean you can process large volumes of material easily. With the Wessex flail mower range, controlling dense vegetation has never been simpler.




Mode 1



Mode 2

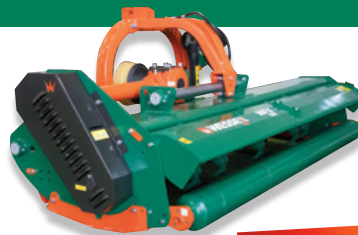

Mode 3

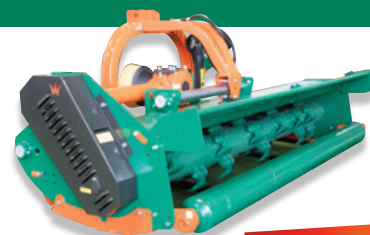

Mode 4


FULLY CLOSED –
For extra mulching.

STANDARD OPERATING –
To eject material behind the
rear roller.

WIDE OPERATING – A wider
exit for processing large volume
of material.

INSPECTION & SERVICE –
Fully open for ease of servicing
and maintenance.

VERSATILE MOWERS FOR HEAVY-DUTY AND EXTREME DUTY MOWING

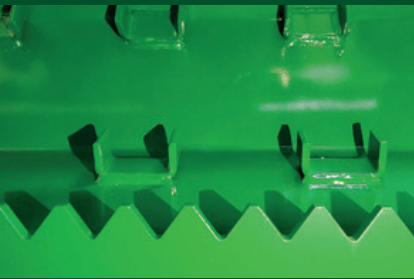

✓ **MULCHING COUNTER-KNIFE & SHREDDING FINS**




✓ **HYDRAULIC SIDE-SHIFT**



✓ **4 BELTS - WFX**



✓ **HEAVY-DUTY HAMMER FLAILS**

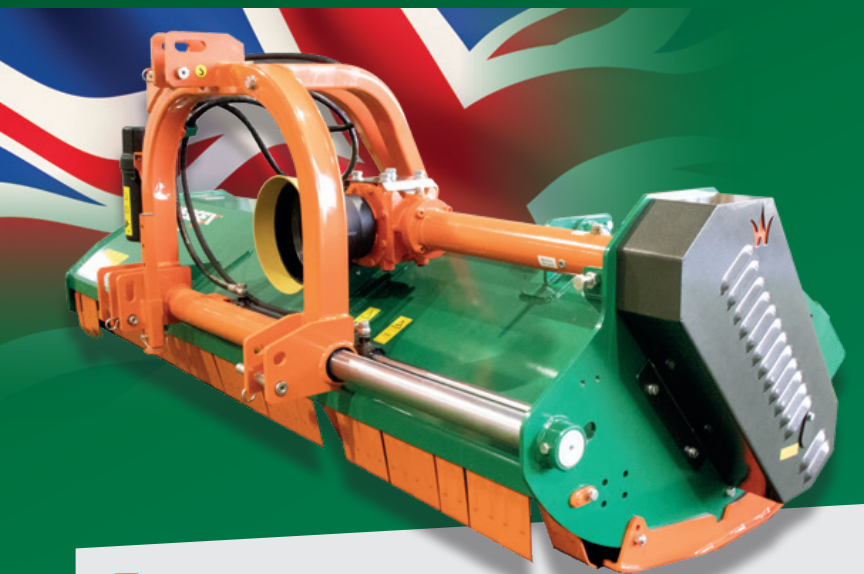

SPECIFICATIONS

	WFX-250	WFX-280	WFR-250	WFR-280
Transport Width (mm)	2720x1200x900	3020x1200x900	2720x1200x900	3020x1200x900
Cutting width (mm)	2500	2800	2500	2800
Weight (kg)	890	1050	1280	1350
Max Tractor HP	140	140	200	200
3-point hitch type	Cat 2	Cat 2	Cat 2	Cat 2
No. of hammer blades	24	28	22	26
Hydraulic side shift	Yes	Yes	Yes	Yes
PTO input speed	540	540	540	540
Transmission type	4 belts	4 belts	5 belts	5 belts
Rotor tube diameter (mm)	165	165	205	205
Roller tube diameter (mm)	173	173	205	205
Opening rear door	Yes	Yes	Yes	Yes
Mulching counter knife	Yes	Yes	Yes	Yes
Max Vegetation thickness	8cm	8cm	10cm	10cm
Mounting	Rear	Rear	Rear	Rear

FEATURES & BENEFITS WFX & WFR

- ✓ **THREE-POINT HITCH CAT. 2** – with hydraulic side shift on chrome-plated slides
- ✓ **DOUBLE SKIN DECK** – gives the machine additional strength and durability
- ✓ **POWDER COATED** – for long life
- ✓ **CHECK & ADJUST THE BELTS REMOTELY** – No need to remove guards
- ✓ **HEAVY DUTY GEARBOX** – designed for long operating hours, equipped with free wheel clutch
- ✓ **ADJUSTABLE REAR ROLLER** – for varying applications
- ✓ **COUNTER-KNIFE AND SHREDDING FINS** – to finely mulch material accelerating the decomposition process of the vegetation.
- ✓ **ADJUSTABLE & REPLACEABLE SIDE SKIDS** – protect the machine minimising the possibility of scalping
- ✓ **CAST HAMMER FLAILS** – for massive impact and superior cut quality.

FEATURES & BENEFITS – (WFR ONLY)

- ✓ **SUITABLE FOR MULCHING GRASSLAND** – set-aside, heavy undergrowth, and material up to 10cm diameter
- ✓ **40% HEAVIER THAN THE WFX** – extremely durable and robust
- ✓ **HIGHER HP RATING** – suitable for tractors up to 200hp
- ✓ **LARGER ROTOR DIAMETER** – the machine will power through dense conditions, whilst maintaining optimum blade tip-speed. The flywheel effect.
- ✓ **LARGER ROLLER DIAMETER** – extremely strong and easily rides on uneven ground.
- ✓ **5 BELT DRIVE** – for extremely strong power transfer in demanding applications

Call: 01264 345878
www.wessexintl.com

 **WESSEX**[®]
INTERNATIONAL

When only the best will do...

Follow us on     